

KUNAL WIRE NETTING INDUSTRY

MANUFACTURER AND EXPORTER OF ALL TYPES OF METALLIC AND PLI CONVEYOR BELTS

To know more about us please visit www.kunalwirenetting.com

Or call: +91-9021897007

or e-mail us at: kunalwire@gmail.com

Our Mission:

"We aspire to become business leaders by exceeding our customer expectations in quality, delivery and cost through continuous improvement."

At KUNAL WIRE NETTING INDUSTRY (Since 2007), we believe a satisfied and happy customer is the best business strategy of all. We work towards creating value for ourselves and our customers through dedication and innovation with constant improvements.

Founded by **Mr. Sanjeev .R. Sharma** who has been working in Conveyor belts manufacturing sector since 1992. He was the former Director of M/s Nari Wire Netting Industry till 2005, who later started his own business venture in 2007.

Backed by a highly innovative and motivated team and with the goal of customer satisfaction in mind we have risen to become one of the leading manufacturers, suppliers and exporters of all types of metallic and PU and Teflon conveyor belts across INDIA, UAE, BANGLADESH, SRI LANKA, NEPAL, PAKISTAN, AFRICA, AUSTRALIA and many more..

With the Goal of becoming business leaders and a well-known brand we promise to transcend in the field of innovation, creativity and customer support.




MR. SANJEEV SHARMA PROPRIETOR

OUR PRODUCTS

- 1) BISCUIT OVEN WIRE BAND (Z-47 ARTICULATED WIRE BAND)
- 2) COMPOUND BALANCED WEAV
 - LK-6 (STIPPER BELT)
 - LK-4 TYPE BELT
 - LK-3 TYPE BELT
 - DOUBLE LOCK CONVEYOR BELT
 - **DUPLEX**
- 3) ENROBER BELT (LADDER BELT)
- 4) HONEY COMB BELT (FLATWIRE BELT)
- 5) CHAIN LINK BELT
- 6) PVC/PU CONVEYOR BELT
- 7) TEFLON BELTS
- 8) WIRE BAND CLEANING BRUSH

1) BISCUIT OVEN WIRE BAND (Z-47 WIRE BAND)

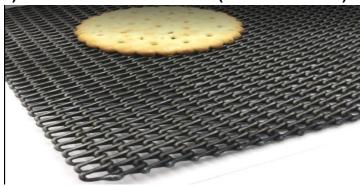

OVEN WIRE BAND (Z-47 ARTICULATED WIRE BAND) is one of the most widely used conveyor belts for biscuit baking, crackers and rotary molded products.

We design the belts to meet the specific requirements of biscuit makers; the belts are long lasting, provide good heating and air flow to the biscuits and are also easy and quick to maintain.

Specifications:

Available in 2 sizes : Pitch: 8.5mm | Bore : 6.25mm Pitch: 8mm | Bore: 5.5mm

Wire dia: Available in 1.4mm to 1.6mm

Material : MS (JSW, TATA), SS, GI

Edges: Welded and non- Welded (AS PER REQUIREMENT)

Application: Biscuit or crackers baking, ceramic heating etc.




2) COMPOUND BALANCED WEAV

COMPOUND BALANCED WEAV is a type of belt where left hand and right hand spirals are fitted closely together for a smooth, dense weav. These are the most universal belts which are ideal for almost any product and in any requirement

- √ 25% more Carrying surface
- ✓ Greater belt stability
- ✓ Truer tracking
- ✓ Can be assembled with rods and chains

These are a class of conveyor belt which is further categorized with different names as per the Pitch and Bore size.

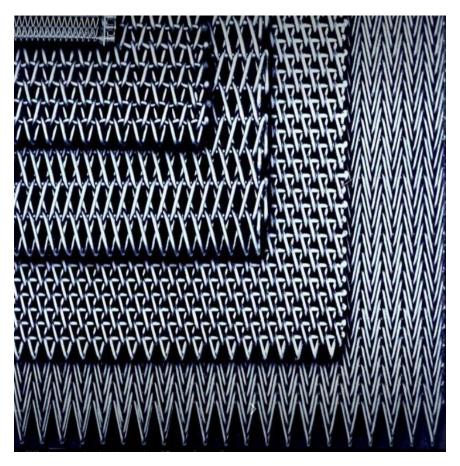

• LK-6 (STIPPER BELT)

Available in: Pitch: 9mm | Bore: 12.5mm

Pitch: 9mm | Bore: 22mm


Pitch: 12.5mm | Bore: 16mm-20mm (CAN ALSO BE MADE AS PER REQUIREMENT)

Wire dia: 0.90mm to 2mm

Material : MS, SS(ALL GRADES), Galvanized Steel

Application: Packing and moving industries, cooling, heating, Oil spray, ceramic coating, fiber glass curing etc.



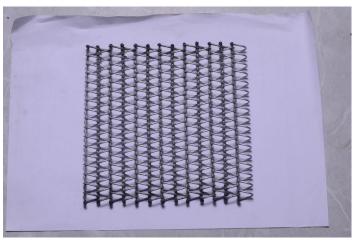

LK-4 TYPE BELT

> Available in : Pitch : 5mm | Bore: 8mm


Pitch: 6mm | Bore: 16mm-20mm

(CAN ALSO BE MADE AS PERREQUIREMENT)

Material : MS, SS(ALL GRADES), GI STEEL

Wire dia: 0.9mm to 2mm


Application: Packing and moving, baking, load carrying etc.

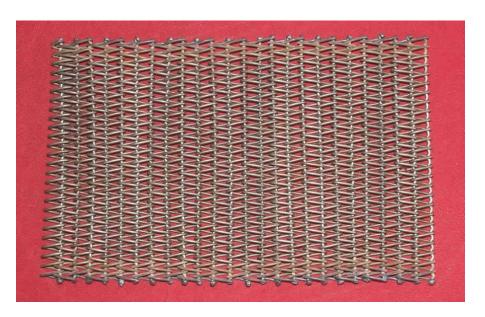

• LK-3 TYPE BELT

- > CAN BE MADE AS PER REQUIREMENT
- Material : MS,SS (ALLGRADES), GI STEEL
- Wire dia: 0.9mm to 1.2mm

Application: Packing and moving industries, baking, small sized munchies, load carrying, pharmaceutical industry, pilot project for paddy/rice, battery cell heat treatment etc.

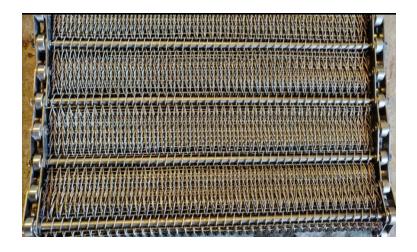

DOUBLE LOCK CONVEYOR BELT


1 creamped wire passes through 2 spirals and provides good load carrying abilities.

- > CAN BE MADE AS PER REQUIREMENT
- Material: MS, SS(ALL GRADES), GI
- Wire dia: 0.9mm to 2mm

Application: Packing and moving, load carrying etc.







DUPLEX


These are manufactured using carbon steel or stainless steel wire coils messed into one another with cross rod to obtain a weave which gives a flat surface.

Material: MS, SS


> Available in Size: 0.90mm - Spiral

1.20mm - Cross rod

Application: Load carrying and small sizes munchies baking.

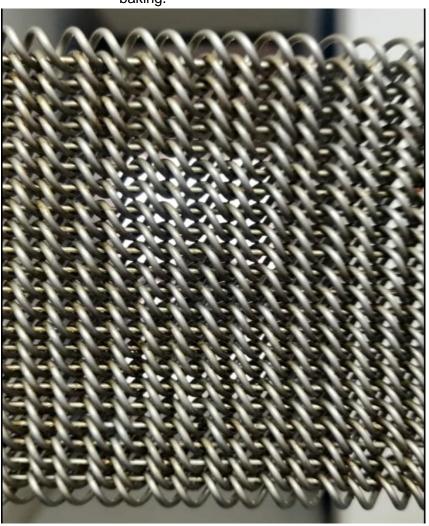

3) ENROBER BELT (aka LADDER BELT)

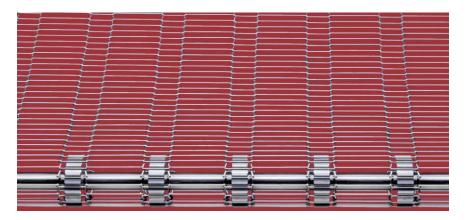

ENROBER BELT or LADDER BELT is the most durable alternative of metal strand belting and lasts 10 times longer than flex type belts. The design provides better tracking, with no edge curling, snags or tangling.

The edges can be finished with either single loop or double loop.

- Material SS (ALL GRADES)
- ➤ Wire dia 0.90mm to 2mm

Application: Used in chocolate industries, biscuits, nuts, snacks Pastry, bread, etc.



4) HONEYCOMB BELT (aka FLAT WIRE BELT)




HONEY COMB BELT or FLAT WIRE BELT is specially used in industrial applications where stability or good drainage or airflow is paramount. It is highly suitable for use in multi-tier conveyors where headroom is restricted. The belt is also in great demand in food processing industry for high level of hygiene is required that is fulfilled by its easy cleaning feature and large open area. It provides easy 30-second splicing reduces maintenance and replacements to minimize down time.

Can be made in both heavy duty and light duty material (AS PER REQUIREMENT)

- Available in: Pitch 0.5" x 0.5" to 1.5" x1.5"
- Material SS (ALL GRADES), MS, GI



5) CHAIN LINK BELT

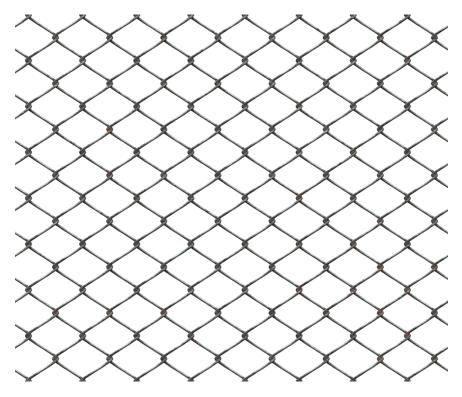

It is the simplest and economical design in metal mesh belts, interwoven by two spiral wire or coil wire, we often call it **CHAIN LINK BELT** because of its big opening and flexibility, it is often used in drying and cooling application, and suitable for light-weight shipping.

- ✓ Friction driving
- ✓ High opening, suitable for air circulation
- ✓ Light- weight
- Available in: Pitch: 1" to 3" (CAN ALSO ME MADE AS PER REQUIREMENT)
- Wire dia: 0.90mm to 2mm
- Material: GI, MS, SS(ALL GRADES)


Application: Fencing, farming (vegetable filtration), cooling, Transport, drainage etc.

6) PVC/PU CONVEYOR BELT



These belts are made from best quality thermoplastic polyurethane (TPU) and are most suitable for both food and industrial applications. Designed in a way to last years without any chemical or physical abrasion.

- > Available in Colors : GREEN, WHITE, BLUE, BALCK
- > Thickness: 1MM to 6MM
- Can be customed with cleats or side walls (AS PER CUSTOMER REQUIREMENT)

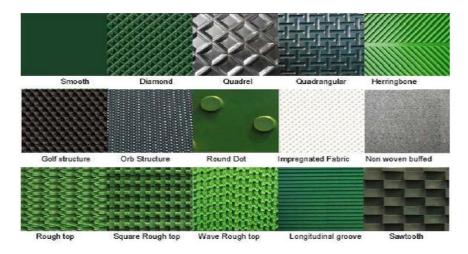

7) TEFLON BELTS



Our **TEFLON BELT or UV CONVEYOR BELT** is suitable for conveying products with highly efficient air distribution systems allowing optimized moisture removal.

Coated with PTFE coated glass fabric belts are used for high temperature range from -200 C to +360 C.

- ✓ Maintenance free
- ✓ Oil resistance
- ✓ Hard-weaving
- ✓ Light weight
- > Available in Width: 5mm to 3000mm
- Available in length: Upto 100 Meters
- Capacity: 1-50 Kg per feet



8) WIRE BAND CLEANING BRUSHES



CIRCULAR WIRE BRUSHES are used for cleaning the carbon accumulated in the wire band after continuous baking. Our brushes are made from high grade raw materials are known for their premium quality.

- > Bristle material: Brass, Nylon, SS, MS, Polypropylene
- > Bristle length: 0.5" to 3"
- Bristle strength:Hard,Medium,Soft (AS PER CUSTOMER REQUIREMENT)

Application: Cleaning, Strip Washers, Paint coating lines, Oil spraying, Sand coting etc.





MR.KUNAL SHARMA: +91-9021897007

MR.SANJEEV SHARMA: +91-9021896900



kunalwire@gmail.com



www.kunalwirenetting.com



Kunal-sharma-241kwni



OFFICE: B/904, WOODSVILLE PHASE -3, OPP. GOLDFIELDS MALL, PUNE, MAHARASHTRA, INDIA- 412105

FACTORY: GAT NO 17, NEAR PUNE-NASHIK HIGHWAY, CHIMBHALI GAON, PUNE, MAHARASHTRA, INDIA- 412105